

J300 LINE




ALTERNATE ACTION PUSHBUTTON SWITCHES



Component Part Determination

The J300 line of switches is available in four standard plunger colors, nine standard adapter (mounting bushing) styles, with DPDT and two circuit contact configuration. The completed catalog number is a composite made up of the "base switch P/N" and suffix letters and numbers, which represent these components.

- To order any J300 series switch:
1. Divide the catalog number.
 2. Select the component parts.
 3. Assemble and mark the completed switch.

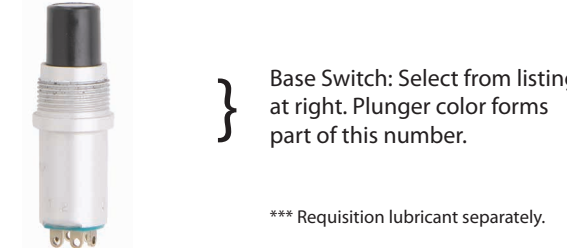

BASE SWITCH LISTING	
Order	To Make Type
P277	J313 * 6
P277R	J313 * 6R
P277W	J313 * 6W
P277GY	J313 * 6GY
P278	J333 * 6
P278R	J333 * 6R
P278W	J333 * 6W
P278GY	J333 * 6GY

*Adapter type number and color appear in this location.

These switches are occasionally used without adapters & "O" Ring seals. The P/N shown (without the *) could be ordered; Ex's (1) J3136, (2) J3336. 1/2-32 mounting nut P/N 15-1577 & 1/2 I.D. Lockwasher P/N 16-3207 not supplied. Order mounting hardware separately if required.

ADAPTERS

Standard Adapter Types and Colors				
Type HA P242	Type M P244	Type N P245	Type P P143	Type PA P144
Type U** P145	Type V** P246	Type W P146	Type Y P147	SPECIFY COLOR
				Black: B Clear: No Letter

Adapters supplied complete with mounting hardware unassembled.
** Adapter Type U and V are used with J300 switch series.

Local contact (Sarasota, FL):

SAFRAN ELECTRICAL & POWER

2250 Whitfield Avenue

Sarasota, FL 34243 USA

Tel. 1-800-955-7354 Fax 941-751-7173

TechnicalSupport.SRQ@SafranGroup.com

SAFRAN ELECTRICAL & POWER

Headquarters : 36 rue Raymond Grimaud 31700 BLAGNAC - FRANCE

Tél. +33 (0)5 34 60 00 00 - Fax +33 (0)5 34 60 01 99

www.safran-electrical-power.com

