

MINIATURE POSITIVE ACTION SWITCHES






Series - 8866-8869

MIL-DTL-8834 Miniature Positive Action Switches
Solder Lug Terminals

FEATURES	SPECIFICATIONS	CURRENT RATINGS										
<ul style="list-style-type: none">Sealed bushingCurrent rating versatility1 and 2 pole circuitryNon-teasible mechanism for all but center "ON" circuitsDry circuit (logic level loads) to power switching levelsWiping action contactsPositive make and break actionSmall and large size bushings and ActuatorSolder lug terminalsAlso available with locking Actuator, integrated wire termination and printed circuit board terminals.	<ul style="list-style-type: none">Bushing seal or bonded seal per MIL-DTL-8834MS approved and QPL'd to MIL-DTL-8834Temperature range: -67°F to +160°F (-55°C to +71°C)Life: 20,000 operations at rated load 40,000 operations mechanical life"O" ring panel seal on ¼" - 40 type bushing sizeSolder lug terminals .050 [1,27] dia. hole	No. of Poles	Catalog Number	Type of Operation	28VDC (Amperes per pole)		115VAC 60Hz and 400Hz (Amperes per pole)					
					Resistive Load	Inductive Load	Resistive Load		Inductive Load			
							28VDC	28VDC	60Hz	400Hz	60Hz	400Hz
		1	8866 8868	Maintained and Momentary	5	1	2	3	1	2		
		2	8867 8869	Maintained and Momentary	5	1	2	3	1	2		
Minimum Rating: 25 microamperes at 5 millivolts.												

Minimum Rating: 25 microamperes at 5 millivolts.

SELECTION TABLE

CIRCUIT WITH LEVER IN . . .					
	Up Position 	Center Position 	Down Position (Keyway) 	Military Part Number	Catalog Number ②
8866 	ONE POLE				
	ON	OFF	ON	MS24655-211	8866K1
	ON	NONE	OFF	-221	K7
	ON	NONE	ON	-231	K4
	ON	OFF	NONE	-241	K5
	* ON	OFF	ON*	MS24655-271	8866K2
	NONE	OFF	ON*	-281	K6
	ON	OFF	ON*	-311	K3
	NONE	ON	ON*	321	K8⓪
8867 	TWO POLE				
	ON	OFF	ON	MS24656-211	8867K1
	ON	NONE	OFF	-221	K7
	ON	NONE	ON	-231	K4
	ON	OFF	NONE	-241	K5
	* ON	OFF	ON*	MS24656-271	8867K2
	NONE	OFF	ON*	-281	K6
	ON	OFF	ON*	-311	K3
	NONE	ON	ON*	MS24656-321	8867K8 ①
	ON	ON	ON	-331	K9 ①
	ON	ON	ON*	-351	K10⓪
	* ON	ON	ON*	-341	K11⓪

* Momentary contact.

See page A75 for special circuit diagrams.


① Dielectric per MIL-DTL-8834 except limited to 1250 volts. Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

② Caution should be exercised during soldering and flux removal. See page A56 for details.

Series - 8866-8869


MINIATURE POSITIVE ACTION SWITCHES MIL-DTL-8834 Miniature Positive Action Switches Solder Lug Terminals

MOUNTING DIMENSIONS - ONE POLE / 8866

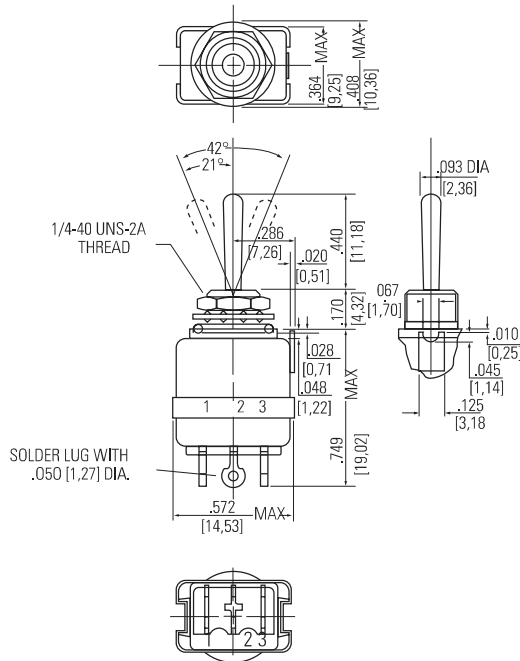

Terminal Identification


MOUNTING DIMENSIONS - TWO POLE / 8867

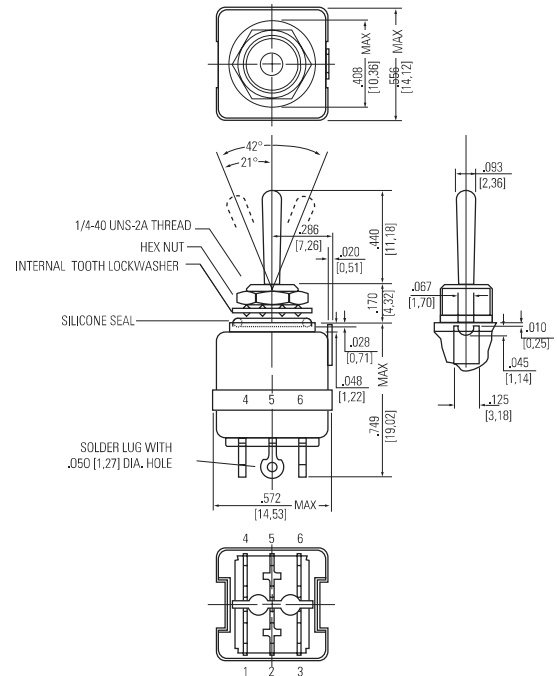

Terminal Identification

Non-functional terminals not supplied.

PANEL CUTOUT DIMENSIONS

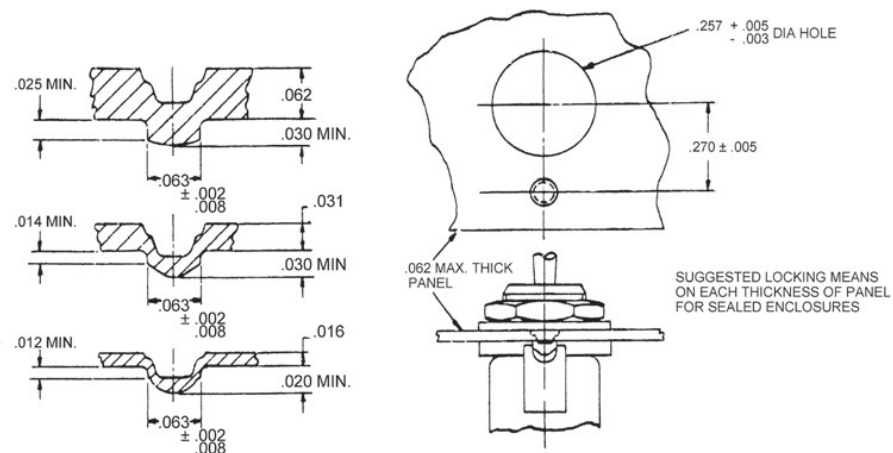

STANDARD
0.00 = inches
[0,0] = mm






Mounting dimensions for reference only.

MINIATURE POSITIVE ACTION SWITCHES

Series - 8866-8869

MIL-DTL-8834 Miniature Positive Action Switches
Solder Lug Terminals

SELECTION TABLE

CIRCUIT WITH LEVER IN . . .							
	Up Position 	Center Position 	Down Position (Keyway) 	MS Part Number	Catalog Number ②	MS Part Number ③	Catalog Number ②
	ONE POLE						
	ON	OFF	ON	MS90310-211	8868K1	Feature Not Available in Single Pole Switches	
	ON	NONE	OFF	-221	K7		
	ON	NONE	ON	-231	K4		
	ON	OFF	NONE	-241	K5		
	* ON	OFF	ON*	MS90310-271	8868K2	—	—
	NONE	OFF	ON*	-281	K6	—	—
	ON	OFF	ON*	-311	K3	—	—
	NONE	ON	ON*	MS21351-321	K8①	—	—
	TWO POLE						
	ON	OFF	ON	MS90311-211	8869K1	MS90311-711	8869K1X
	ON	NONE	OFF	-221	K7	-721	K7X
	ON	NONE	ON	-231	K4	-731	K4X
	ON	OFF	NONE	-241	K5	-741	K5X
	* ON	OFF	ON*	MS90311-271	8869K2	MS90311-771	8869K2X
	NONE	OFF	ON*	-281	K6	-781	K6X
	ON	OFF	ON*	-311	K3	-811	K3X
	NONE	ON	ON*	MS21353-321	8869K8 ①	MS21353-821	8869K8X①
	ON	ON	ON	-331	K9 ①	-831	K9X①
	ON	ON	ON*	-351	K10 ①	-851	K10X①
	* ON	ON	ON*	-341	K11 ①	-841	K11X①

*** Momentary contact.**

① Dielectric per MIL-DTL-8834 except limited to 1250 volts. Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

② Caution should be exercised during soldering and flux removal. See page A56 for details.

③ Furnished with Bonded Seal Feature. (Meets 15' water sealing level requirements.)


Series - 8866-8869

MINIATURE POSITIVE ACTION SWITCHES

MIL-DTL-8834 Miniature Positive Action Switches


Solder Lug Terminals

MOUNTING DIMENSIONS - ONE POLE / 8868

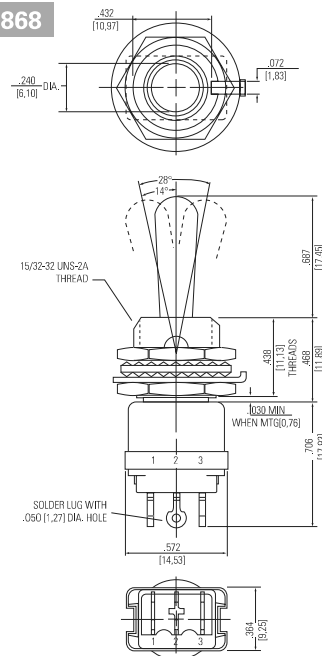

Terminal Identification

MOUNTING DIMENSIONS - TWO POLE / 8869

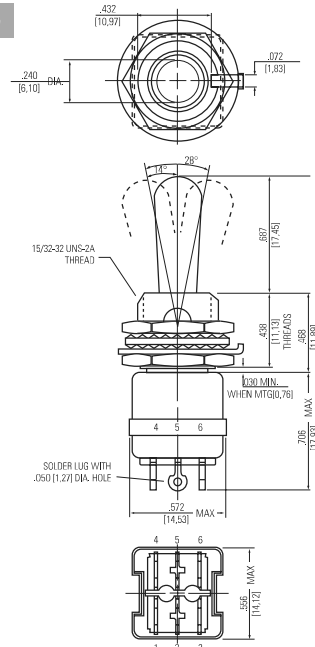

Terminal Identification

STANDARD
0.00 = inches
[0,0] = mm

Mounting dimensions for reference only.

Non-functional terminals not supplied.

MINIATURE POSITIVE ACTION SWITCHES

Series - 8866-8869



MIL-DTL-8834 Miniature Positive Action Switches
Solder Lug Terminals

OPTIONS/ACCESSORIES

- Special mounting hardware
- Special marking
- Mounting hardware furnished assembled
- Panel seal, Part Number 32-341
- Lever extensions and attachable tips
- Special circuits
- Special bushing and lever plating
- Mounting adapter nuts
- Custom wire harnesses
- EMI/RFI capability on two pole (large bushing)
- Gold plated contacts

PANEL CUTOUT DIMENSIONS

15/32 DIA. BUSHING



STANDARD

0.00 = inches

[0,0] = mm

Mounting dimensions for reference only.

See page A56 for soldering and cleaning recommendations.