



ADVANCED MICRO LITES,  
INC.

**T-3/4 LAMPS**

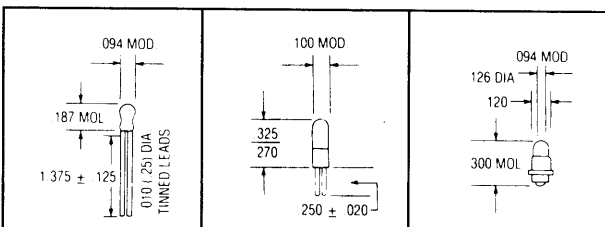

Design Volts	Design Amps	Candle Power	Filament Shape	Average Life (Hours)	WIRE TERMINAL LAMP NUMBER	BI-PIN LAMP NUMBER	MIDGET FLANGED LAMP NUMBER
5.0	.021	.03	C-2R	10,000	2	7112	
5.0	.06	.05	C-2R	25,000	6833		
5.0	.06	.15	C-2R	3,000	6153		
5.0	.075	.09	C-2R	25,000	7133		
5.0	.08	.15	C-2R	15,000	8666		
5.0	.115	.15	C-2R	40,000	7153		8270

**T-1 STANDARD LAMPS**

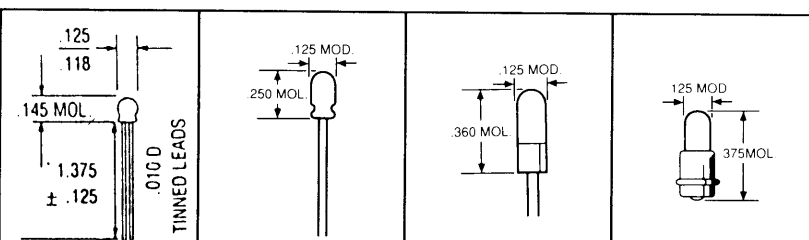

Design Volts	Design Amps	Candle Power	Filament Shape	Average Life (Hours)	SHORT T-1 LAMP NUMBER	WIRE TERMINAL LAMP NUMBER	BI-PIN LAMP NUMBER	MIDGET FLANGED LAMP NUMBER
1.5	.075	.03	C-2R	16,000		7203		
2.5	.10	.10	C-2R	10,000			7732	
5.0	.02	.03	C-2R	10,000	2022	6022		
5.0	.03	.03	C-2F	16,000		7210	7263	7234
5.0	.06	.03	C-2R	60,000	6802	680		682
5.0	.06	.05	C-2R	25,000	6832	683	7683	685
5.0	.06	.15	C-2R	5,000	6152	6150	7265	6180
5.0	.075	.09	C-2R	25,000	7132	713	7714	714
5.0	.08	.15	C-2R	3,000				7235
5.0	.115	.15	C-2R	40,000	7152	715	7715	718
5.0	.115	.15	C-2R	16,000		6809*		
5.0	.125	.25	C-2R	5,000		7216		
10.0	.027	.10	C-2F	10,000			8095	7240
12.0	.06	.15	C-2F	10,000		7219	8097	32
14.0	.065	.15	C-2F	10,000		8111	8098	8112
18.0	.026	.15	C-2F	10,000		7220	8099	7241
28.0	.024	.15	CC-2F	16,000		6838	7839	6839
28.0	.020	.15	CC-2F	10,000	7009			

\*Helium Retardant

FOR ADDITIONAL LAMPS NOT LISTED IN THIS CATALOG, PLEASE CONTACT AML DIRECT.